

IBERITAL



Speciality coffee lovers, meet power

Iberital VISTA

DUAL BOILER Technology



Because your goals are on the horizon, and
IBERITAL VISTA is what keeps you moving.

Eco-designed for comfortable and efficient movement, the height of the Iberital VISTA allows you to better see and interact with the customer, allowing you to effortlessly create a more personalised experience.

Automate and control the parameters of extraction with Iberital VISTA's touchscreen display that provides greater precision.

Iberital VISTA comes with a dual boiler system, one boiler for coffee and one boiler for hot water and steam. With greater control, the barista can set the correct and precise temperature for serving coffee and ensure high temperature stability, even in peak hours and high demand coffee shops.

IBERITAL VISTA- It's in our DNA

Iberital VISTA

DUAL BOILER

Connect with your customers with speciality coffee



Dual boiler system

Thermal insulated boilers and intelligent energy save management

PID Electronic Temperature Control

Pre-infusion profile for each dosage selection. Possibility of selection of the ON/OFF time of pre-infusion

TFT touchscreen display

Touch pad with white leds

Barista area LED lighting

Electronic dosage in millilitres (4 doses + continuous)

Ergonomic portafilter

Ergonomic drip tray that increases comfort

Automatic boiler refill



Boiler drain tap located in the centre of the drip tray

Programmable AUTO ON/OFF for each weekday

Quick and easy access to the machine for maintenance

Volumetric control

Cup warmer

Cool touch steam wands (optional)

IBERITAL Connect (optional)



Available in 3 finishes


Choose your favourite finish



WHITE




BLACK

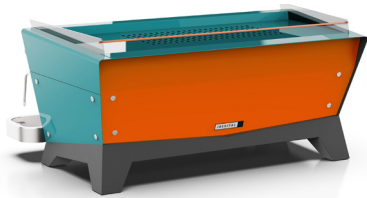

COLOUR





Backlit WHITE

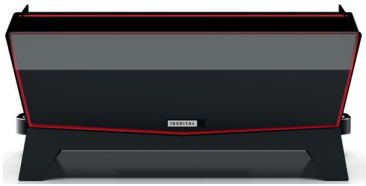

Backlit BLACK

Available in 2 sizes

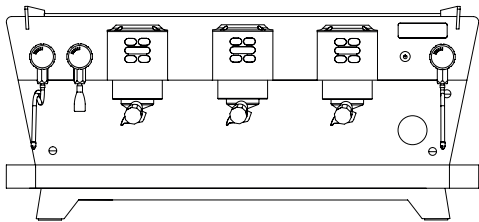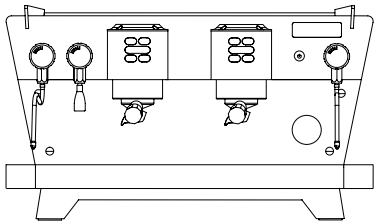

Technical Specifications	2 Groups	3 Groups
Coffee boiler capacity	3 L	4 L
Steam boiler capacity	8.3 L	11.5 L
Heating element power	4200 W	4200 W
Weight	60,6 Kg	91 Kg
Dimensions L x W x H	845 x 672 x 460 mm	1016 x 672 x 460 mm
Front distance between legs Side distance between legs: 440 mm	715 mm	890 mm

International Certification

